# 3 SECTION
## ELECTRIC & MANUAL

**TITAN**MED

A very strong, robust and aesthetically pleasing treatment couch available with optional breathing hole and removable plug. Our three section plinths feature 55mm retractable positioning castors with an adjustable self-levelling foot making them ideal for a wide range of healthcare environments and treatments procedures.

**TMU3H** - Hydraulic height elevation
**TMU3E** - Electric height elevation

Safe working load and lifting capacity of 250kg (39 stone)

## STANDARD SPECIFICATION

- Safe working load and lifting capacity of 250kg (39 stone)
- Choice of 2 models - hydraulic or electric height elevation
- Gas spring assisted back rest from -30 to +85 degrees
- The power assisted head section incorporates anti-trap design
- Excellent height range from 48cm to 97cm
- Purpose made precision bearings on all pivot points
- Hoist clearance along entire length of couch
- Hand switch fitted as standard on electric models
- 50mm high density flame-retardant foam
- Antimicrobial contoured upholstery
- Fully compliant and CE marked

## OPTIONAL ACCESSORIES

- Motorised backrest
- Single foot switch operation for electric models
- Double foot switch operation for electric models
- Paper towel holder
- Cot sides (powder coated, chrome plated or padded)

## DIMENSIONS

- Length: 192cm (head 69cm, seat 50cm, foot 68cm)
- Width: 65cm
- Safe Load: 250kg
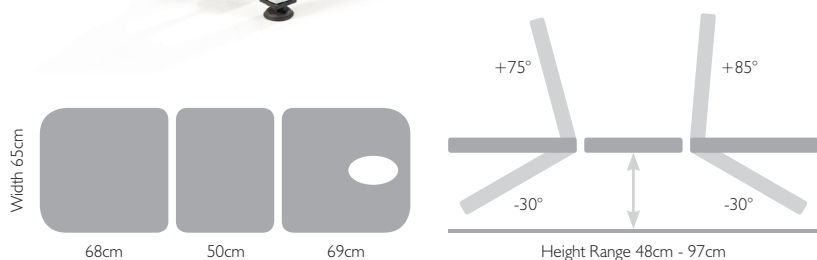- Height range: 48cm - 97cm

## WARRANTY

- 3 year warranty on moving components
- Lifetime warranty on frame

## STANDARDS

- EEC classification - MDD93/42/EEC Annex IX Class I
- IP rating - IPx4
- Electrical standard - IEC601 Part 1+ 60601. P (EN)
- Vinyl flame retardant to CRIB5 (BS7176 inc. foam)
- Foam to BS 5852: Part 2: 1982, Ignition Source 5 (CRIB5)

Width 65cm

68cm  50cm  69cm

+75°   +85°
-30°   -30°

Height Range 48cm - 97cm

Made in the UK

bsi UKAS MANAGEMENT SYSTEM
MD 560448

MEDILINK

ABHI